

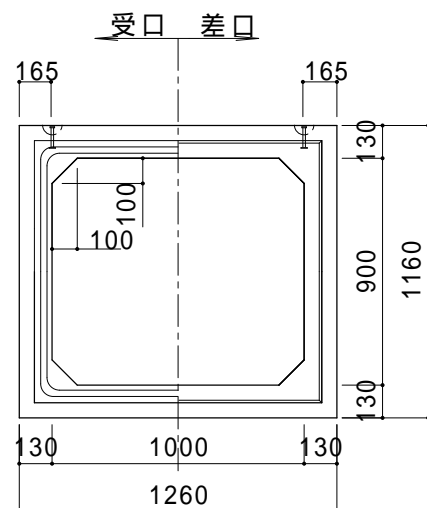


平面图

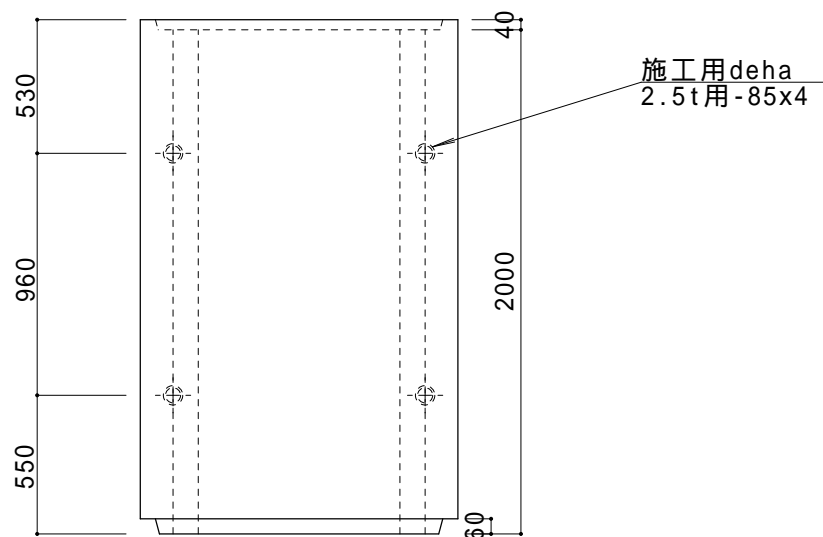


側 面 図

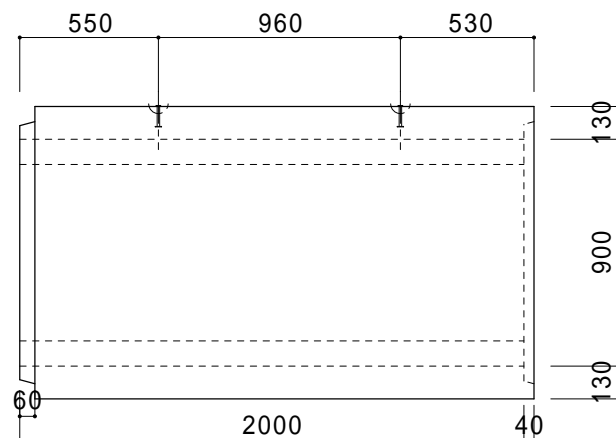

設計条件

コンクリート	
設計基準強度	ck = 40 N/mm ²
許容曲げ圧縮応力度	ca = 14 N/mm ²
鉄筋	
許容引張応力度	sa = 160 N/mm ²
活荷重	T - 25
土被り	H = 0.2 ~ 3.0 m
鉄筋コンクリートの単位体積重量	c = 24.5 KN/m ³
土の単位体積重量	= 18.0 KN/m ³
土圧係数	K ₀ = 0.50
製品参考重量	W = 2910 Kg

継手部詳細図 S=1 / 10

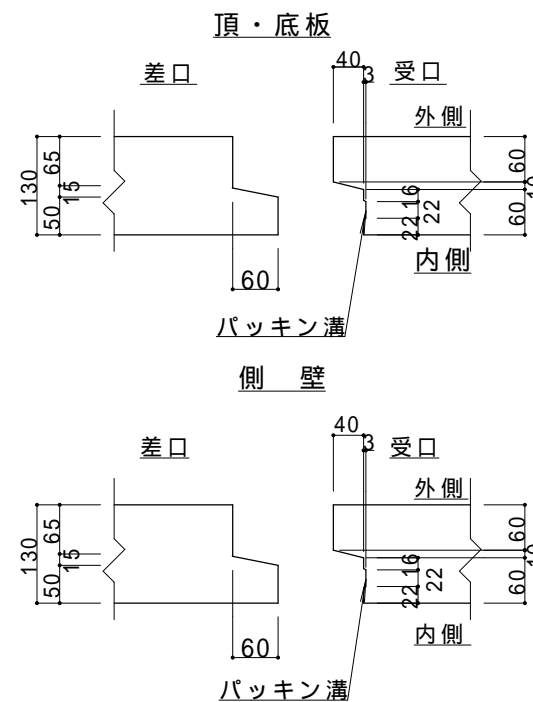

2910kg

(備考) 寸法や強度に影響を及ぼさない範囲で、端面の面取り、パッキン溝及び吊り孔等の加工を行ってもよい。

花沢建材工業株式会社

TEL 0479-86-3741 FAX 0479-86-5500

圖	名
1	...
2	...
3	...
4	...
5	...
6	...
7	...
8	...
9	...
10	...
11	...
12	...
13	...
14	...
15	...
16	...
17	...
18	...
19	...
20	...
21	...
22	...
23	...
24	...
25	...
26	...
27	...
28	...
29	...
30	...
31	...
32	...
33	...
34	...
35	...
36	...
37	...
38	...
39	...
40	...
41	...
42	...
43	...
44	...
45	...
46	...
47	...
48	...
49	...
50	...
51	...
52	...
53	...
54	...
55	...
56	...
57	...
58	...
59	...
60	...
61	...
62	...
63	...
64	...
65	...
66	...
67	...
68	...
69	...
70	...
71	...
72	...
73	...
74	...
75	...
76	...
77	...
78	...
79	...
80	...
81	...
82	...
83	...
84	...
85	...
86	...
87	...
88	...
89	...
90	...
91	...
92	...
93	...
94	...
95	...
96	...
97	...
98	...
99	...
100	...

ボックスカルバート 1000X900H x 2000

縮 尺

1 / 30

面図

0403-2019

製 図

